

# 3M™ 305EA Trizact™ Belt

Structured abrasive finishing belt




## Product Construction

<i>Mineral</i>	Silicon Carbide
<i>Bonding</i>	Resin bond.
<i>Backing</i>	Rayon Flexible cloth, J-weight
<i>Coating</i>	Trizact
<i>Size</i>	605 mm x 50 mt 635 mm x 45,7 mt

<i>Grit Range</i>	Trizact Grit Range	FEPA Grit Range
	A5	≈ P6500
	A3	≈ P8000

f

## Available Forms



## Applications

f Materials:  
f Stainless steel and cobalt

f

f

f

## Recommendation

Recommended for superfinishing and prebuffing applications

# 3M™ 305EA Trizact™ Belt

## Features

Very flexible backing

3-dimensional structured replicated pyramide-like shape.

Soft resin bond

## Advantages

Comfortable

Perfectly designed caliper, flexibility, integrated oscillation.

Programmed mineral release, low pressure belt.


## Benefits

Very good surface finish, able to grind complicated shapes

Uniform and consistent finish from part to part.

Very long lasting within and tight finishing range.steps.

## Machines

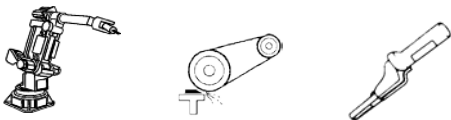

## Safety



## Quality

3M Plants are ISO 9002 certified.

*Product Use: All statements, technical information and recommendations contained in this document are based on tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.*



**3M Italia SpA**  
**Reperto ASD Abrasivi Industriali**

Via Norberto Bobbio,21  
20069 – Pioltello Milano

Tel: 02 7035 2529

Fax: 02 93660172

Data Sheet: 305EA

Issued 06/11

© 3M 2011. All rights reserved.