

DEWALT®

ENGINEERED BY **POWERS™**


MUSHROOM AND FLAT HEAD SPIKE ANCHORS ARE TAMPERPROOF

ONE-PIECE VIBRATION RESISTANT ANCHOR

NO SECONDARY TIGHTENING OPERATION REQUIRED REDUCING THE OVERALL COST OF INSTALLATION

PRE-EXPANDED ANCHOR ; S-SHAPED DESIGN ALLOWS EASY INSTALLATION

HEAD STYLES

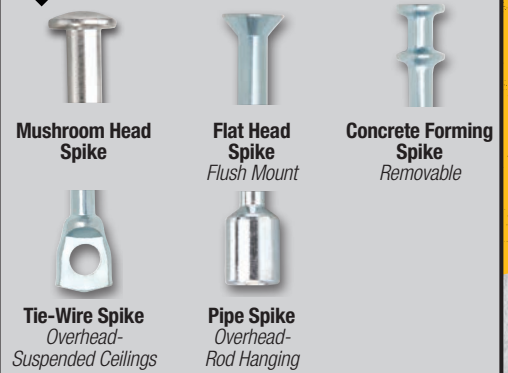

TYPICAL APPLICATIONS


- Tamperproof applications
- Cable trays and strut
- Available in corrosion resistant stainless steel for exterior applications
- Pipe hanging
- Metal track attachments
- Concrete formwork

APPROVALS

**ASTME 488
AC01**

Tested in accordance with ASTM E488 and AC01 criteria

BASE MATERIALS

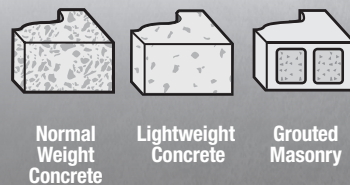

PRE-EXPANDED ANCHOR

Spike®

MUSHROOM HEAD SPIKE		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
05502	3/16" x 1"	3/16"	100	1000
05503	3/16" x 1-1/4"	3/16"	100	1000
05504	3/16" x 1-1/2"	3/16"	100	1000
05506	3/16" x 2"	3/16"	100	1000
05508	3/16" x 2-1/2"	3/16"	100	600
05510	3/16" x 3"	3/16"	100	600
05511	3/16" x 3-1/2"	3/16"	100	600
05512	3/16" x 4"	3/16"	100	600
05522	1/4" x 1"	1/4"	100	1000
05523	1/4" x 1-1/4"	1/4"	100	1000
05524	1/4" x 1-1/2"	1/4"	100	1000
05526	1/4" x 2"	1/4"	100	600
05528	1/4" x 2-1/2"	1/4"	100	600
05530	1/4" x 3"	1/4"	100	600
05531	1/4" x 3-1/2"	1/4"	100	600
05532	1/4" x 4"	1/4"	100	600
05546	3/8" x 2"	3/8"	25	250
05548	3/8" x 2-1/2"	3/8"	25	150
05550	3/8" x 3"	3/8"	25	150
05551	3/8" x 3-1/2"	3/8"	25	150
05552	3/8" x 4"	3/8"	25	150
05554	3/8" x 5"	3/8"	25	150
05556	3/8" x 6"	3/8"	25	125
05569	1/2" x 2-3/4"	1/2"	50	200
05571	1/2" x 3-1/2"	1/2"	50	150
05572	1/2" x 4"	1/2"	25	125
05574	1/2" x 5"	1/2"	25	125
05577	1/2" x 6-1/2"	1/2"	25	100

MUSHROOM HEAD SPIKE		316 STAINLESS STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
06602	3/16" x 1"	3/16"	100	1000
06603	3/16" x 1-1/4"	3/16"	100	1000
06604	3/16" x 1-1/2"	3/16"	100	1000
06606	3/16" x 2"	3/16"	100	1000
06623	1/4" x 1-1/4"	1/4"	100	1000
06624	1/4" x 1-1/2"	1/4"	100	600
06626	1/4" x 2"	1/4"	100	600
06628	1/4" x 2-1/2"	1/4"	100	600
06630	1/4" x 3"	1/4"	100	600
06646	3/8" x 2"	3/8"	25	250
06648	3/8" x 2-1/2"	3/8"	25	250
06650	3/8" x 3"	3/8"	25	250

The published length is measured from below the head to the end of the anchor.

PIPE SPIKE		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
03755	1/4"	3/16"	100	600
03758	3/8"	1/4"	50	300

TIE-WIRE SPIKE		CARBON STEEL			
CAT #	SIZE	DRILL DIA	WIRE HOLE	CTN	MSTR
03756	3/16"	3/16"	3/16"	100	600
03759	1/4"	1/4"	9/32"	100	600

FLAT HEAD SPIKE		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
05608	3/16" x 2-1/2"	3/16"	100	600
05610	3/16" x 3"	3/16"	100	600
05612	3/16" x 4"	3/16"	100	600
05624	1/4" x 1-1/2"	1/4"	100	1000
05626	1/4" x 2"	1/4"	100	600
05628	1/4" x 2-1/2"	1/4"	100	600
05630	1/4" x 3"	1/4"	100	600
05631	1/4" x 3-1/2"	1/4"	100	600
05632	1/4" x 4"	1/4"	100	500


The published length is the overall length of the anchor.

CONCRETE FORMING SPIKE		CARBON STEEL		
CAT #	SIZE	DRILL DIA	CTN	MSTR
03795	3/16" x 1-1/2"	3/16"	100	600
03796	3/16" x 2"	3/16"	100	600
03797	3/16" x 2-3/4"	3/16"	100	600
03794	1/4" x 2-3/4"	1/4"	100	500

SPIKE INSTALLATION TOOL		
CAT #	SIZE	CTN
03790	Spike Driver 1000	1



Flat Head Spike is tamperproof

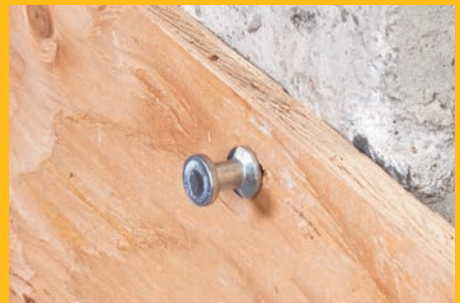

Concrete Forming Spike is removable



Tie-Wire Spike for ceiling wire

RELATED PRODUCTS



DCH293R2DH
20V MAX* XR® SDS PLUS
ROTARY HAMMER W/DUST
COLLECTION



DCH273P2DHO
20V MAX* XR® SDS PLUS ROTARY
HAMMER W/ON-BOARD DUST
EXTRACTOR



DCH133M2
20V MAX* XR® 1" D-HANDLE
SDS+ ROTARY HAMMER



DWHT51064
22 OZ ONE-PIECE
STEEL HAMMER

For 20V MAX Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

1-800-4-DEWALT

www.DEWALT.com

Copyright ©2019 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWSPKISS