


DynaCut Eyelet Sanding Stars

COATED ABRASIVES

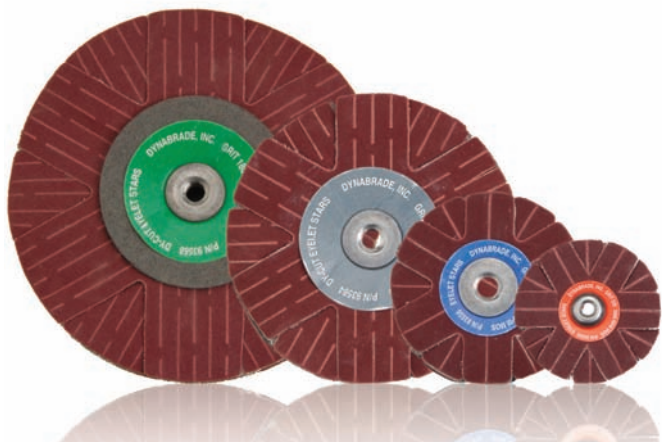

Common Applications

Denibbing and sanding white wood raised panels

Blending and scuffing sealer coatings on contours or flat surfaces

Metal deburring and polishing

Pipe I.D. cleaning

A/O Aluminum Oxide

Please call for availability

Diameter	Female Thread	80 Grit	120 Grit	150 Grit	180 Grit	220 Grit	320 Grit	400 Grit
3/4" (19 mm)	A/O 3-48	93579	93580	93581	93582	93583	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1" (25 mm)	A/O 3-48	93586	93587	93588	93589	93590	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
1-1/2" (38 mm)	A/O 8-32	93541	93542	93543	93544	93545	93546	93547
2" (51 mm)	A/O 1/4"-20	93551	93552	93553	93554	93555	93556	93557
3" (76 mm)	A/O 1/4"-20	93558	93559	93560	93561	93562	93563	93564
4" (102 mm)	A/O 1/4"-20	93565	93566	93567	93568	93569	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Eyelet Star Mandrels



NOTE: The rated RPM of a mounted sanding star is reduced when using flexible shafts

When using the flex shaft for finishing inside diameters, place the eyelet sanding star inside the workpiece, then start the tool.



Diameter Inch (mm)	CHOOSE EYELET STAR...						
	80	120	150	Grit 180	220	320	400
3/4 (19)	93579	93580	93581	93582	93583	-	-
1 (25)	93586	93587	93588	93589	93590	-	-
1-1/2 (38)	93541	93542	93543	93544	93545	93546	93547
2 (51)	93551	93552	93553	93554	93555	93556	93557
3 (76)	93558	93559	93560	93561	93562	93563	93564
4 (102)	93565	93566	93567	93568	93569	-	-

Mandrel P/N	...THEN CHOOSE MANDREL		
	Length Inch (mm)	Max. Operating Speed	Male Thread
93534	3 (76)	5,000	3-48
93533	7 (178) Flex	3,200	3-48
93548	3 (76)	5,000	8-32
93532	7 (178) Flex	3,200	8-32
93550	3 (76)	5,000	1/4"-20
93531	7 (178) Flex	3,200	1/4"-20
93550	3 (76)	5,000	1/4"-20
93531	7 (178) Flex	3,200	1/4"-20