


# Hydraulic Wedgie and Spread Cylinders


▼ Shown clockwise from top: WR-15, WR-5, A-92




- **Single-acting, spring return**
- **WR-5 wedgie cylinder:** for use in very confined work areas
- **WR-15 spread cylinder:** for long stroke spreading applications
- **A-92, Spreader attachment:** threads on 10 ton RC-Series DUO cylinders (except RC-101).




WR-5

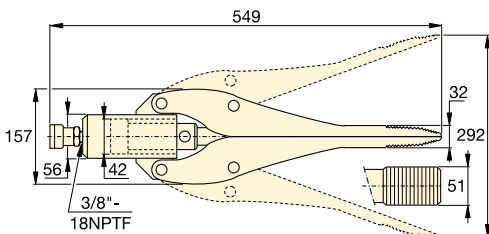

WR-15



A-92

Cylinder Capacity	Tip Clearance	Model Number	Maximum Spread	Cylinder Effective Area	Oil Capacity	
ton (kN)	(mm)		(mm)	(cm <sup>2</sup> )	(cm <sup>3</sup> )	(kg)
1,0 (8,9)	12,8	WR-5	94	6,5	10	2,3
0,75 (6,0)	32,0	WR-15	292	14,5	64	11,3
1,0 (8,9)	35,0	A-92	158	–	–	3,6

## A, WR Series

Capacity:

**0,75 - 1,0 ton**

Tip Clearance:

**12,8 - 35,0 mm**

Maximum Spread:

**94 - 292 mm**

Maximum Operating Pressure:

**700 bar**



### RC-Series DUO Cylinders

10 ton RC-Series DUO cylinders (except RC-101) fit into A-92 Spreader Attachment.

Page: 60



### Best Match Hand Pump

To power your WR-5, WR-15 and A-92 Spreader attachment the **P-392 Hand Pump** is an ideal choice. See [www.enerpac.com](http://www.enerpac.com) or

the Enerpac Industrial Tools catalogue for the full range of hand pump options.

Page: 60

▼ A WR-5 hydraulic wedgie cylinder is used for maintenance on a bridge bearing.

