




9565CV

125mm Angle Grinder

1400W

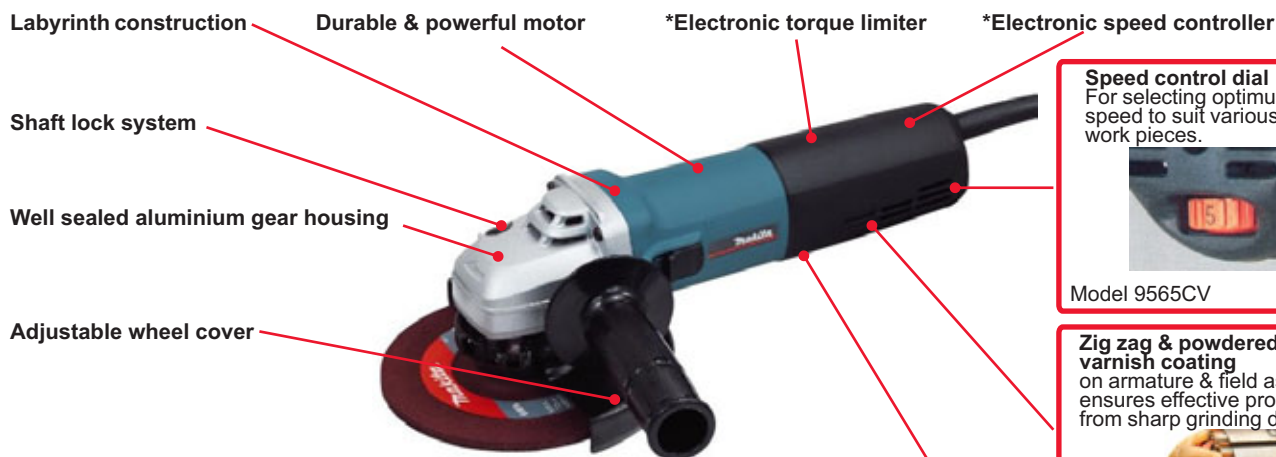

Speed control dial
For selecting optimum rotating speed to suit various work pieces.



Model 9565CV

Zig zag & powdered varnish coating
on armature & field assembly ensures effective protection from sharp grinding dust.



Models 9564Z, 9565Z & 9565CV

SJS - Super Joint System
Lock spring joining spiral bevel gear & armature shaft



Models 9564Z, 9565Z & 9565CV

MAKITA ADVANTAGE

- Labyrinth construction protects all ball bearings from dust and debris.
- High power and durability from a compact S60 type motor.
- The wheel cover's position can be adjusted without using tools.
- The aluminium gear housing is well sealed to prevent grease leakage.
- Shaft lock system for safe and easy replacement of abrasive wheel.
- SJS - lock spring joining the spiral bevel gear and armature shaft provides the following benefits.
 - Smooth and comfortable grinding.
 - Suppression of shock in the unlikely event of accidental wheel lock during operation.
 - Prevention of damage to gear caused by accidental wheel lock.

SPECIFICATIONS:

Maximum Capacities:

Depressed centre wheel	125mm
Abrasive disc	125mm
Diamond wheel	125mm
Continuous rating input	1 400W
No load speed	2 800 -12 000r/min
Overall length	299mm
Net weight	2.4kg
Power supply cord	2.5m
Carbon brush	CB318

FEATURES:

Double insulation, Super Joint System
Soft start, electronic speed control & variable speed.

STANDARD EQUIPMENT:

Depressed centre wheel, lock nut wrench & grip

OPTIONAL ACCESSORIES

Description	Part No.
Diamond blade, segmented	A-84115 or A-80438
Diamond blade, corrugated	A-84143
Diamond blade, waffle	B-02054
Rubber pad & nut	B-00860
Lock nut 14-45	224543-0
Inner flange 13-42 DIN45	224298-7
Lock nut wrench 35 large 2 pin	782407-9
Sanding lock nut 14 -48	224515-5
Special lock nut 14-45 (Prevents lock-up)	192567-3

