


Non-woven abrasives

POLINOX® mounted flap wheels

POLINOX® mounted flap wheels PNL
Aluminum oxide A

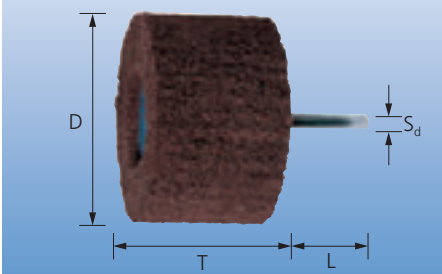


Made of multiple elements of non-woven abrasive material, arranged radially. Dense packing of the layers ensures a long service life. Used mainly for surface conditioning.

Abrasive: Aluminum oxide A


PFERD specification number
PNL A

PFERDERGONOMICS®



Diameter (D) x length (T) [Inches]	Shank dia. (S _d) [Inches]	Grit and EDP number			Recom. speed RPM	Max. RPM	
		100	180	280			
1-1/2 x 3/4	1/4	46201	46202	46203	7,500	15,000	10
2 x 1	1/4	46204	46205	46206	6,000	12,000	10
2-3/8 x 2	1/4	46207	46208	46209	5,000	10,000	10
3 x 1	1/4	46251	46252	46253	4,000	7,500	10
3 x 2	1/4	46210	46211	46212	4,000	7,500	10

POLINOX® mounted flap wheels PNZ
Aluminum oxide A

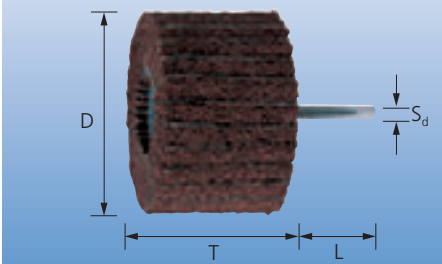


The non-woven abrasive is arranged in multiple radial elements with abrasive cloth interlayers. This structure permits an improved stock removal and produces a coarser finish.

Abrasive: Aluminum oxide A

PFERD specification number
PNZ A

PFERDERGONOMICS®



Diameter (D) x length (T) [Inches]	Shank dia. (S _d) [Inches]	Grit and EDP number		Recom. speed RPM	Max. RPM	
		100	180			
1-1/2 x 3/4	1/4	46219	46225	7,500	15,000	10
2 x 1	1/4	46220	46226	6,000	12,000	10
2-3/8 x 2	1/4	46221	46227	5,000	10,000	10
3 x 1	1/4	46269	46270	4,000	7,500	10
3 x 2	1/4	46222	46228	4,000	7,500	10
4 x 2	1/4	46223	46229	3,000	6,000	5

