


# Polishing products


## Felt points, mounted felt flap wheels

### Felt points, shape WRC

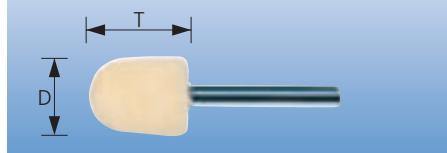


Cylindrical felt points with radius end (shape WRC) are the points of choice for minor concave and convex contours.

**PFERD specification number**  
FK WRC

Diameter (D) x length (T) [Inches]	Shank dia. x shank length [Inches]	EDP number	Recom. speed RPM	Max. RPM	
5/16 x 1/2	1/8 x 1-5/8	48630	12,000 - 24,000	59,500	10
3/8 x 9/16	1/8 x 1-5/8	48631	10,000 - 20,000	47,500	10
9/16 x 3/4	1/4 x 1-5/8	48632	6,000 - 12,000	31,500	10
3/4 x 1	1/4 x 1-5/8	48633	5,000 - 10,000	23,500	10
1 x 1-1/4	1/4 x 1-5/8	48634	4,000 - 8,000	19,000	10

### Mounted felt flap wheels

**NEW**

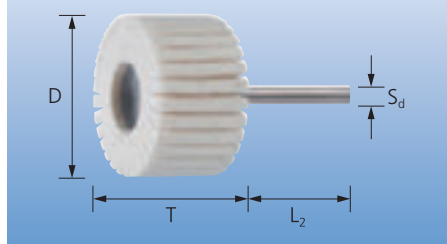


Mounted felt flap wheels are used with polishing pastes for pre-polishing and high-gloss polishing of small to medium-sized components.

With its flap design, this polishing product adapts ideally to the workpiece contours. The thermal load of the workpiece is significantly reduced.

### Recommendations for use

- The hard type is ideal for pre-polishing flat surfaces.
- The soft type is optimal for high-gloss polishing and processing workpieces with lots of contours.
- If very fine finishes need to be achieved, the two types can be used successively. This requires the use of suitable polishing pastes.

**PFERD specification number**  
FLS

Diameter (D) x length (T) [Inches]	Shank dia. (S <sub>d</sub> ) [Inches]	Type and EDP number		Recom. speed RPM	Max. RPM	
		W (soft)	H (hard)			
1 x 3/8	1/4	48540	48541	7,500	24,500	5
1 x 1	1/4	48542	48543	7,500	24,500	5
2 x 1	1/4	48546	48547	3,800	12,000	5
3 x 1	1/4	48550	48551	2,400	7,500	5
3 x 2	1/4	48552	48553	2,400	7,500	5

