


Dual external reinforcement layers provide high wheel strength and stability. This heavy-duty construction prevents the wheel from flexing when cutting pressure is applied, allowing for straight cuts.

Advantages

- Very long service life
- High lateral stability
- For demanding cutting work

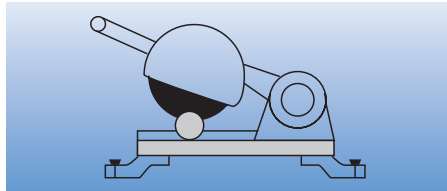

Abrasive: Aluminum oxide A

Workpiece material
Steel

Applications

Cutting of sections, solid material, profiles and tubes


Recommendation for use

Ideal for portable electric chopsaws generating 5 horsepower or higher, and small, low-power stationary machines.

PFERD specification number
A 30 L SG-CHOP-HD



Steel
Hardness grade L

Diameter x thickness nominal [Inches]	Thickness metric [mm]	Bore [Inches]	EDP number		Max. RPM
80 m/s					
12 x 7/64	3.0	1	64530	20	5,100
14 x 7/64	3.0	1	64531	10	4,400
16 x 1/8	4.0	1	64532	10	3,800

