



Extended flag length provides a better surface finish than standard twist knot brushes, while brushing more aggressively than crimped wire wheels.

Ordering note


All wheels with 1-1/4" arbor holes include 1/4" x 1/8" keyways.

Made in the USA.

Standard twist, single row, long flag



EDP 81881


Dia. d ₁ [Inches]	Arbor hole d ₂ [Inches]	No. of knots	Trim length l ₂ [Inches]	Face width b [Inches]	Width on arbor [Inches]	Included adapter [Inches]	Wire diameter and EDP number				Recom. speed [RPM]	MSFS max. [RPM]	Adapter style	
							.012	.014	.016	.020				
Carbon steel wire														
6	5/8	32	1-1/8	5/8	9/16	1/2	81880	81881	-	-	4,500 - 6,500	9,000	F	10
8	5/8	42	1-5/8	5/8	5/8	-	-	81889	-	-	3,500 - 5,000	7,000	-	2
10	1-1/4	50	2-1/8	3/4	5/8	-	-	-	81904	-	2,500 - 4,000	5,400	H	2
12	1-1/4	60	2	3/4	5/8	-	-	-	-	81930	2,000 - 3,500	4,500	H	2




For deflashing/cleaning of insert molded rubber parts, removing heavy surface contamination, and heavy deburring of machine parts.

Made in the USA.

Heavy duty, standard twist, double row, long flag

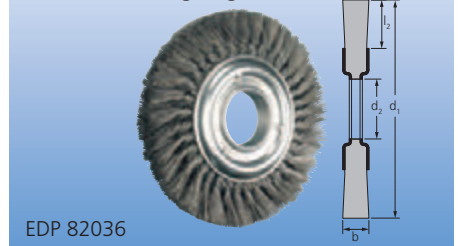

EDP 82036

Dia. d ₁ [Inches]	Arbor hole d ₂ [Inches]	No. of knots	Trim length l ₂ [Inches]	Face width b [Inches]	Width on arbor [Inches]	Included adapter [Inches]	Wire diameter and EDP number				Recom. speed [RPM]	MSFS max. [RPM]	Adapter style	
							.012	.014	.016	.023				
Carbon steel wire														
4	5/8	44	3/4	1	1-1/8	1/2	-	82032	-	-	6,000 - 12,000	20,000	D	5
6	2	60	1-1/8	1	1-1/8	-	82033	-	82034	-	4,000 - 6,000	7,800	C	5
8	2	72	1-5/8	1-1/8	1-1/8	-	82035	-	82036	82037	3,000 - 4,500	6,000	C	1
10	2	100	2-1/8	1-1/4	1-1/4	-	82038	-	82039	82040	2,500 - 3,500	4,800	C	1
12	2	120	2	1-5/8	1-1/4	-	82041	-	82042	82043	2,000 - 3,000	4,000	C	1