




These short trim very aggressive wheel brushes are ideal for heavy cleaning and burr removal.

Extremely heavy duty removal.
Maximum brushing action.

Made in the USA.

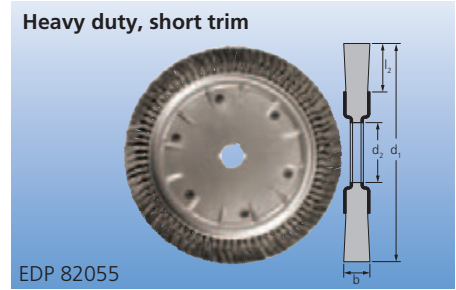

Diameter d ₁ [Inches]	Arbor hole d ₂ [Inches]	No. of knots	Trim length l ₂ [Inches]	Face width b [Inches]	Width on arbor [Inches]	Keyway dimensions [Inches]	Wire diameter and EDP number			Recom. speed [RPM]	MSFS max. [RPM]	Adapter style	
							.014	.020					

Carbon steel wire

10	2	60	1-1/8	3/4	1/2	-	-	82053		2,500 - 4,000	5,400	C	2
12-1/2	1-1/4	80	1-1/2	1/2	1/2	1/4 x 1/8	82055	-		2,000 - 3,000	4,300	H	2
14	2	90	1-1/2	1/2	1/2	1/2 x 1/4	82062	-		700 - 2,500	3,850	C	2




Full cable twist knot wheel brushes feature tightly twisted knots for low flex, high impact brushing action. Narrow face allows better control of surface contact area. Full cable twist is ideal for the toughest brushing applications where surface finish is a low priority.


For weld cleaning, weld spatter removal, scale removal, cleaning, deburring, and flash removal.

Recommendation for use

For optimal performance, use on angle grinders.

Made in the USA.

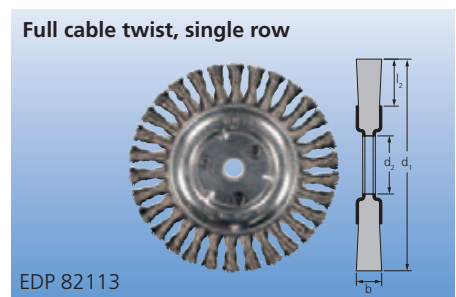

Diameter d ₁ [Inches]	Arbor hole d ₂ [Inches]	No. of knots	Trim length l ₂ [Inches]	Face width b [Inches]	Width on arbor [Inches]	Included adapter [Inches]	Wire diameter and EDP number			Recom. speed [RPM]	MSFS max. [RPM]	Adapter style	
							.014	.020	.023				

Carbon steel wire

4	1/2	22	3/4	3/8	7/16	3/8	-	82101	-	10,000 - 15,000	20,000	F	10
4	5/8	22	3/4	3/8	7/16	1/2	82102	-	-	10,000 - 15,000	20,000	F	10
4-1/2	7/8	24	13/16	1/2	7/16	-	-	82452	-	6,000 - 9,000	12,500	F	10
6	5/8	30	1-1/4	1/2	9/16	1/2	-	-	82113	5,000 - 7,500	10,000	F	10
8	5/8	42	1-5/8	3/8	5/8	-	-	-	82118	3,500 - 5,000	7,000	-	2
10	3/4	36	2-5/8	3/8	5/8	-	-	-	82120	2,500 - 4,000	5,400	-	2