
Power wire brushes Unthreaded knot wheel brushes





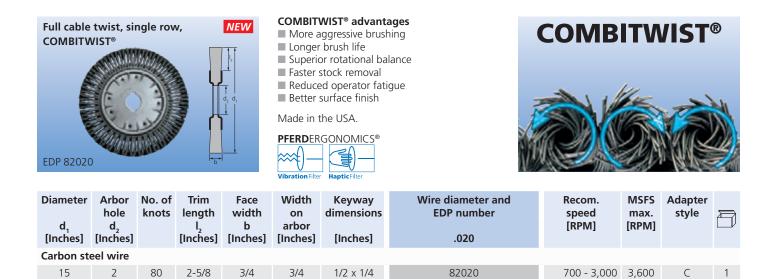

PFERDMEDIA

For more information and to see a product video, visit pferdusa.com/vcombitwist



Long trim for joint penetration, and finer wire for extended life. Used for removing road joint material. Features 3/8" drive pin hole.

Recommendation for use Used on walk-behind and portable machines.

Made in the USA.



Diameter d,	Arbor hole d	No. of knots	Trim length I	Face width b	Width on arbor	Wire diameter and EDP number		Recom. speed [RPM]	MSFS max. [RPM]	
[Inches]	[Inches]		[Incĥes]	[Inches]	[Inches]	.028	.035			
Carbon steel wire										
10	1	40	2-1/4	3/8	1/2	82075	82076	2,000 - 3,000	6,000	2
12	1	40	3	3/8	1/2	82077	82078	2,000 - 3,000	6,000	2
12	20 mm	40	3	3/8	1/2	82085	82086	2,000 - 3,000	6,000	2

