

Power wire brushes


Stem mounted specialty brushes



Conforms to contours of the workpiece providing a light deburring or cleaning action. Used for scuffing rubber and cleaning plastic molds, light removal of flashing, carbon, rust and paint.

Made in the USA.





Diameter [Inches]	Shank dia. [Inches]	Wire diameter and EDP number					Recom. speed [RPM]	MSFS max. [RPM]	
		.006	.008	.010	.014	.020			
Carbon steel wire									
1-1/4	1/4	82925	82926	-	-	-	10,000 - 15,000	20,000	10
1-1/2	1/4	-	82927	-	-	82928	7,000 - 10,500	14,000	10
2	1/4	-	-	82929	82930	-	7,000 - 10,500	14,000	10
3	1/4	82931	82932	-	82933	82934	7,000 - 10,500	14,000	10
4	1/4	-	82949	-	-	-	7,000 - 10,500	14,000	10
Stainless steel wire (INOX)									
1-1/2	1/4	-	82935	-	-	-	5,500 - 9,000	14,000	10
2	1/4	-	-	82936	-	-	5,500 - 9,000	14,000	10
3	1/4	-	82938	-	-	-	5,500 - 9,000	14,000	10



Side and bottom brushes are ideal for cleaning the side and bottom of blind holes. The brush face can also be turned 45 degrees to clean snap ring grooves and other recessed features. Mount in drill press or portable tool.

Made in the USA.

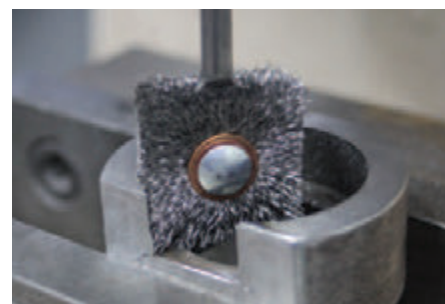

Workpiece I.D. [Inches]	Shank dia. [Inches]	Square trim length [Inches]	Face width [Inches]	Overall length [Inches]	Wire diameter and EDP number	Recom. speed [RPM]	MSFS max. [RPM]	
					.006			
Carbon steel wire								
1	1/4	1/4	1/2	3-5/8	82880	1,500 - 3,000	4,500	10
1-1/4	1/4	3/8	1/2	3-3/4	82882	1,500 - 3,000	4,500	10
1-1/2	1/4	1/2	1/2	4	82883	1,500 - 3,000	4,500	10
1-7/8	1/4	11/16	1/2	4-1/8	82884	1,500 - 3,000	4,500	10