




Bridle reduces wire filament flare and increases aggressiveness of brushing action.


Ordering note

Trim length is 1/2" with bridle, 1" without bridle.

Made in the USA.

Crimped wire, bridled

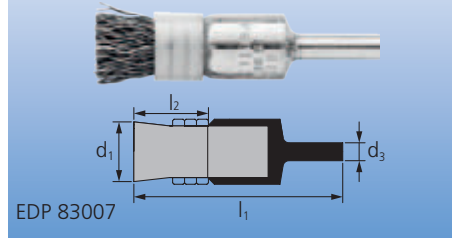

Diameter [Inches]	Outside dia. d ₁ [Inches]	Shank dia. d ₃ [Inches]	Trim length l ₂ [Inches]	Wire diameter and EDP number					Recom. speed [RPM]	MSFS max. [RPM]	
				.006	.008	.010	.014	.020			
Carbon steel wire											
1/2	5/8	1/4	1/2, 1	83005	-	83007	-	-	7,500 - 11,200	15,000	10
3/4	7/8	1/4	1/2, 1	83010	-	83012	-	-	7,500 - 11,200	15,000	10
1	1-1/8	1/4	1/2, 1	83015	83016	83017	83018	83019	7,500 - 11,200	15,000	10

Stainless steel wire (INOX)

All stainless steel (INOX) brushes are degreased.

1/2	5/8	1/4	1/2, 1	83024	-	83026	-	-	6,000 - 10,000	15,000	10
3/4	7/8	1/4	1/2, 1	83027	-	83029	-	-	6,000 - 10,000	15,000	10
1	1-1/8	1/4	1/2, 1	83030	-	83032	-	-	6,000 - 10,000	15,000	10



Encapsulation provides excellent tip control, reduced flare, and aggressive brushing action. Ideal for removal of rubber flashing.

Ordering note


For additional information on ECAP® encapsulation, please see page 13.


Recommendation for use

Suitable tool drives: straight grinders, flexible shafts.

Made in the USA.

Crimped wire, hollow centre, ECAP® encapsulated

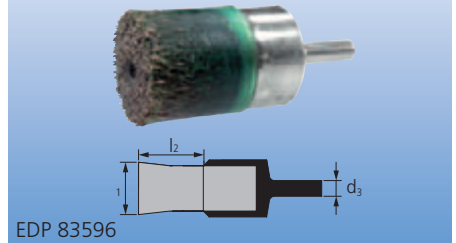

Diameter [Inches]	Outside dia. d ₁ [Inches]	Shank dia. d ₃ [Inches]	Trim length l ₂ [Inches]	ECAP® grade	Wire diameter and EDP number	Recom. speed [RPM]	MSFS max. [RPM]	
					.010			
Carbon steel wire								
1/2	5/8	1/4	7/8	E3	83580	9,000 - 13,500	18,000	10
3/4	7/8	1/4	7/8	E3	83583	7,500 - 11,200	15,000	10
1	1-1/8	1/4	7/8	E4	83596	6,500 - 10,000	13,000	10
Stainless steel wire (INOX)								
3/4	7/8	1/4	7/8	E3	83591	6,000 - 10,000	15,000	10