


Power wire brushes


Stem mounted end brushes

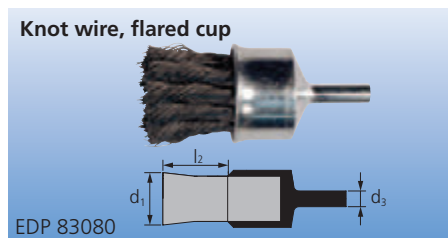


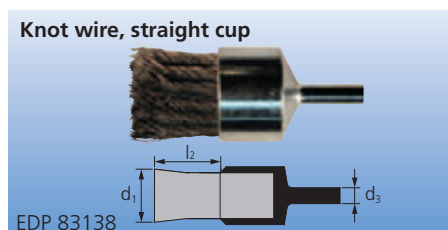
For heavy-duty and severe applications, recessed areas and corners such as weld and mold cleaning.

Suitable tool drives: straight grinders, flexible shafts. Recommended for use on variable speed tools. Available with coated cup to prevent damage to workpiece.

Made in the USA.

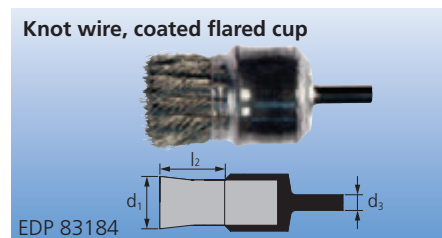


Diameter [Inches]	Outside dia. d ₁ [Inches]	Shank dia. d ₃ [Inches]	Trim length l ₂ [Inches]	No. of knots	Wire diameter and EDP number				Recom. speed [RPM]	MSFS max. [RPM]	
					.006	.010	.014	.020			
Carbon steel wire											
1/2	5/8	1/4	1	6	83063	83064	83065	-	10,000 - 15,000	20,000	10
3/4	7/8	1/4	1	8	83070	83071	83072 P	83073 P	10,000 - 15,000	20,000	10/5
1	1-1/8	1/4	1	12	83077	83078	83079 P	83080 P	10,000 - 15,000	20,000	10/5
Stainless steel wire (INOX)											
All stainless steel (INOX) brushes are degreased.											
1/2	5/8	1/4	1	6	-	-	83087	-	8,000 - 13,000	20,000	10
3/4	7/8	1/4	1	8	83090	83091	83092 P	83093	8,000 - 13,000	20,000	10/5
1	1-1/8	1/4	1	12	83096	83097	83098 P	83099	8,000 - 13,000	20,000	10/5
Stainless steel wire (INOX) – coated cup											
All stainless steel (INOX) brushes are degreased.											
3/4	7/8	1/4	1	8	83178	-	83180	-	8,000 - 13,000	20,000	10
1	1-1/8	1/4	1	12	83182	83183	83184	-	8,000 - 13,000	20,000	10
Brass wire											
1	1-1/8	1/4	1	12	-	-	83104	83105	8,000 - 13,000	20,000	10




Straight cup reduces knot flare, making this brush ideal for reaching into holes and confined areas.

Made in the USA.



Diameter [Inches]	Outside dia. d ₁ [Inches]	Shank dia. d ₃ [Inches]	Trim length l ₂ [Inches]	No. of knots	Wire diameter and EDP number			Recom. speed [RPM]	MSFS max. [RPM]	
					.010	.014	.020			
Carbon steel wire										
1/2	5/8	1/4	1-1/8	6	83124	83125	-	10,000 - 15,000	20,000	10
3/4	7/8	1/4	1-1/8	8	83131	83132	83133	10,000 - 15,000	20,000	10
1	1-1/8	1/4	1-1/8	12	83138 P	83139	83140	10,000 - 15,000	20,000	10/5
Stainless steel wire (INOX)										
All stainless steel (INOX) brushes are degreased.										
1/2	5/8	1/4	1-1/8	6	-	83147	-	8,000 - 13,000	20,000	10
3/4	7/8	1/4	1-1/8	8	83151	83152	83153	8,000 - 13,000	20,000	10
1	1-1/8	1/4	1-1/8	12	83157	83158	83159	8,000 - 13,000	20,000	10
Brass wire										
1	1-1/8	1/4	1	12	-	83164	-	8,000 - 13,000	20,000	10

Diameter [Inches]	Outside dia. at 0 RPM [Inches]	Flared cup, outside dia. at 20,000 RPM [Inches]	Straight cup, outside dia. at 20,000 RPM [Inches]
1/2	5/8	2-7/8	2-3/4
3/4	7/8	2-7/8	2-3/4
1	1-1/8	3-1/4	3



PFERDMEDIA

For more information and to see a product video, visit pferdusa.com/vendbrush