

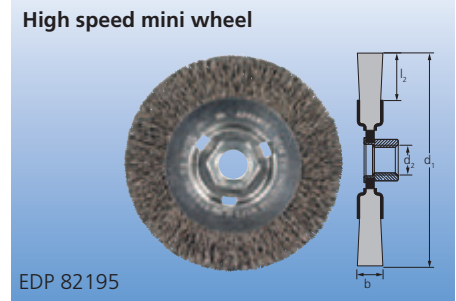
Crimped wire wheel brushes are less aggressive than knot wire type for lighter-duty applications. Crimped wire is more flexible, and leaves a superior surface finish.


For weld cleaning, rust, paint, adhesive and oxidation removal, cleaning, light deburring, and flash removal.



Recommendation for use
Recommended for use on angle grinders.

Ordering note
Please see below for thread adapters.

Made in the USA.



Diameter d ₁ [Inches]	Thread size d ₂ [Inches]	Trim length l ₂ [Inches]	Face width b [Inches]	Wire diameter and EDP number	Recom. speed [RPM]	MSFS max. [RPM]	
				.014			
Carbon steel wire							
4	5/8-11	11/16	1/2	82195 P	6,000 - 12,500	12,500	5/5
4-1/2	5/8-11	15/16	1/2	80024	6,000 - 12,500	12,500	5
5	5/8-11	1-1/8	1/2	80036	6,000 - 12,500	10,000	5
Stainless steel wire (INOX)							
4	5/8-11	11/16	1/2	82316	5,000 - 6,000	12,500	5
4-1/2	5/8-11	15/16	1/2	80354	5,000 - 6,000	12,500	5
5	5/8-11	1-1/8	1/2	80366	5,000 - 6,000	10,000	5
Brass wire							
4	5/8-11	11/16	1/2	82367	5,000 - 6,000	12,500	5

Minigrinder adapter insert	Fits brush thread	Fits tool spindle thread	EDP number	
 EDP 84646	5/8-11	M10x1.25	84645 P	5/5
	5/8-11	M10x1.50	84646 P	5/5
	5/8-11	3/8-24	84647 P	5/5



Brushes available in POP packaging are marked with a "P" in this catalogue. To order brushes in POP versions, please add a "P" to the end of the EDP number.

The minimum order quantity of POP items is printed in "blue" accordingly.